



J-1280

JAW CRUSHER



STRONG **HERITAGE**, STRONG **FUTURE**



J-1280

JAW CRUSHER



The Finlay® J-1280 hybrid mobile jaw crusher offers operators the flexibility to power the plant either by an onboard genset powerpack configuration or connected to an external power source. Both power options provide operators with significant power, servicing and maintenance cost savings in direct comparison to a diesel/hydraulic powered plant.

The machine is fitted with a high powered alternator that generates sufficient energy that can be used to power downstream screening plants or stockpile conveyors further improving overall fuel consumption and efficiencies of production trains.

The machine incorporates a Terex® 1200 x 820mm (47" x 32") high performance electrically driven single toggle jaw chamber.

The integrated pan and heavy duty VGF feeder features automatic power monitoring to regulate and control material flow to the jaw chamber to prevent overflow and give optimum production in quarrying, mining, demolition and recycling applications. Additional benefits include, rapid set up time, ease of maintenance, high reduction ratio, high output capacity and advanced electronic control system.

The machine is also available with an optional independent prescreen that incorporates a longer pan feeder and hopper side walls.


FEATURES:

- > The plant's electrically driven power systems provide significant cost advantages and environmental efficiencies.
- > Superior performance in dusty applications and in high altitude environments.
- > Automatic variable speed VGF ensures continuous choke feeding of the crushing chamber for optimal productivity.
- > High powered electric drive ensures precise chamber controls and reverse functionality for clearing blockages and assisting in construction demolition, asphalt and recycling applications.
- > T-Link telematics hardware and software along with free seven year data subscription are fitted and installed as standard.

TRANSPORT DIMENSIONS



WORKING DIMENSION

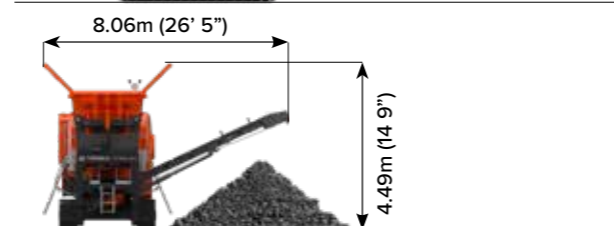

MACHINE WEIGHT: * 75,060kg (165,480lbs)
By-pass with VGF. Pre-screen option and extended folding conveyor option

1 HOPPER/FEEDER

Hopper capacity: 9.3m³ (12.2yds³)
Feed height: 4.49m (14' 9")
Hopper type: Hydraulic locking from ground level
Hopper body: Abrasion resistant feed hopper with hydraulic struts and pins
Feeder speed range: variable, 450-900 rpm

2 BY-PASS CONVEYOR (OPTIONAL)

Belt Width: 750mm (2' 5")
Working Angle: 25° max
Hydraulically folds for transport
Discharge Height: 3.79m (12' 5")
Stockpile capacity: 89m³ (117yds³) @ 40°



T-LINK TELEMATICS

T-Link telematics hardware and software along with free seven year data subscription are fitted and installed as standard.

3 JAW CRUSHER

Terex chamber single toggle jaw crusher
Inlet width: 1200mm (47")
Inlet gape: 820mm (32")
Maximum Closed Side Settings (CSS) : 200mm (8")
Minimum Closed Side Settings (CS S): 75mm (3")
Reverse action for clearing blockages
Full hydraulic closed side setting adjust

4 MAGNET (OPTIONAL)

Belt width: 750mm (2' 6")
Drive: Electric motor & planetary gearbox drive
Right hand side discharge standard

5 MAIN CONVEYOR

Belt Width: 1.2m (3' 11")
Working Angle: 21°
Discharge Height: 4m (13' 1")
Impact bars and wear resistant liners at feed point
Standard Stockpile capacity: 136m³ (178yds³) @ 40°





The material in this document is for information only and is subject to change without notice.

Finlay® assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein.

Due to continual product development we reserve the right to change specifications without notice. Product performance figures given in this brochure are for guidance purposes only, this information does not constitute an expressed or implied warranty or guarantee, but shows test examples. These results will vary depending on application. Photographs are for illustrative purposes only; some or all of the machines in the illustrations may be fitted with optional extras. Please check with your Dealer for details on optional extras.

Published and Printed in 2022

www.terex.com/finlay

E: sales@terexfinlay.com

T: +44 28 82 418 700

